

# Michel's

# Harvest Pro-Tech

## Combine Cover Manual



Installation Instructions – Page 2-6

*Operating Instructions – Page 7*

*Warranty – Page 7*

*Trouble Shooting – Page 7 - 8*

***Please read entire Instructions before beginning!***

***Pictures are for reference only and may not be of actual combine!***

\*Note: Left side is referred to the unloading auger side.

**For Model's:  
John Deere S660, S670, S760, & S770**


**Please forward onto Customer**

## **Installation Instructions**


### ***Step 1: Hood Placement Bracket Installation***

(See Figure 1-3)

Mount the hood placement brackets on the front and back extension panels on the corner part of the extension. There are 4 brackets to be mounted. They are placed tight up against the outside of the lip of the extension and tight up against the top edge of the extension. On some later models the hopper support iron brace on the front hopper has been removed. The hood locating bracket then needs to be measured from the Hopper support tubing at a distance of 3-1/4" for the hood placement bracket to be in the correct location. (See Figure 1) These brackets hold the hood latches in place when hoods are installed on the combine. It also provides placement for the hoods when installing on the combine. Drill through the combine extension using the slots in the bracket as a template. Drill through the top half of the slots. Secure to the combine with 5/16"x3/4" bolts and lock nuts with the head of the bolts to the outside of the extension. Repeat for other 3 corners.

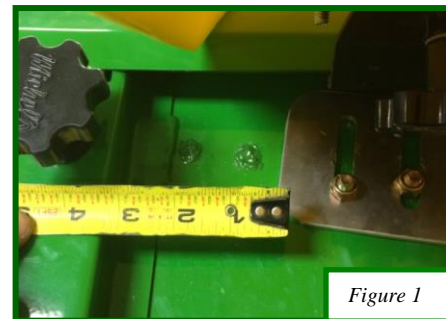

Place the right rear extension plate on the extension so the cut out in the plate aligns with the outside edge of the vertical support on the extension. Secure to the extension with (2) 1/4"x1" lag screws. This is not required on a 2015 and new combines.

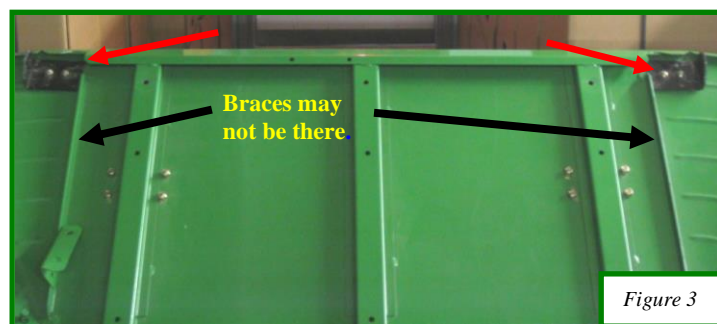

### ***Step 2: Front Rolltube Assembly Installation*** (See Figure 3-4)

With the front extension up drill through the two existing top holes in the two outside support braces on the extension with a 13/32" bit. (Figure 3)

Fold the front extension down and brace up with a 2x4 so extension sits level. Place the front rolltube assembly (tarp) on the extension so the holes line up. Make sure you have the side marked passenger (PS) of the rolltube bracket on the right (passenger) side of the combine. Then install two 3/8" x 3" carriage head bolts through the rolltube bracket and the extension. Secure together with two plastic 3/8" female knobs on the inside of the hopper. Place the extension back up into place



### ***Step 4: Rear Rolltube Assembly Installation*** (See Figure 4-5)

The hand railing has to be in the UP position before you install the rolltube assembly so you are still able to open up your covers.

With the rear extension up drill through the two existing top holes in the two outside support braces on the extension just like Step 2.

Place two 3/8" x 3" carriage bolts through the 1" x 2" aluminum tubing. Then place the assembly up against the rear extension so the motor is on the opposite side of the unloading auger. Align and slide the carriage head bolts through the extension and tighten together with plastic 3/8" female knobs.




### ***Step 5: Hood Assembly Installation*** (See Figure 6-12)

Attach the hood latches to the plastic hoods with 1/4"x1" truss head bolts (3) 1/4" flat washers, 1/4" nylon washers. There are three latches per hood (1 & 2).

**Note:** On one of the hoods with the raised lettering (opposite of Figure 6) the green latch will be installed in the same location as ref 1 in Figure 6. (See Figure 7)

**Note:** On the 2015+ John Deere S660, S670 & S760, S770 combines use four bent hinges on the front and back (1). The side hinges (2) are the standard hinges.

When bolting the latches onto the hoods add the cable with the plastic knob (4) to one of the bottom corner bolts. Slide the cable over the bolt and then place the washer and secure with nylon lock nut. When tightening the bolts, you will need to use a Robinson screw driver on the bolt so it will not turn. Tighten the bolt so the head of it is slightly indented in the hood. Once tighten make sure the head of the bolts are smooth or they will wear the tarp.

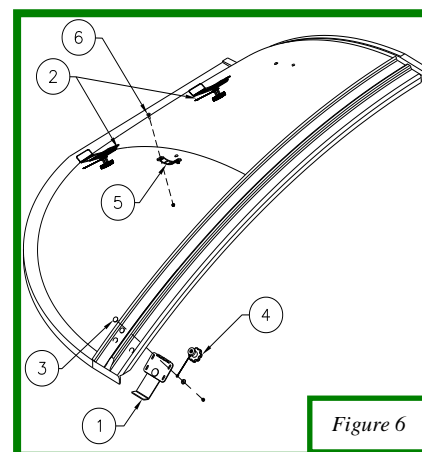

Install the strap handles (5) onto the inside of the hoods with 1/4" x 3/4" truss head bolts (6), 1/4" flat washers, 1/4" nylon lock nuts. Fold the ends of the straps over and slide the bolt through both holes. Install a cable and plastic knob on the hoods without a decal/writing on it. On the inside lip of the hood, drill close to the same area as shown in the Figure 7 & 12. Secure it with a 1/4"x3/4" bolt, washer and nylon lock nut.



Figure 7



Figure 8

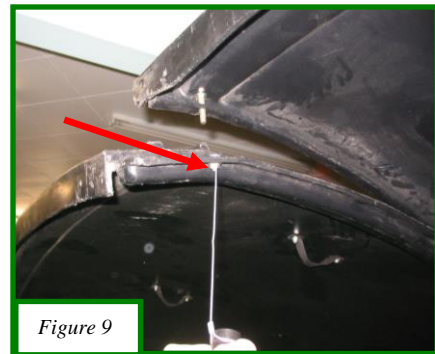


Figure 9

Once the hoods are prepped, carry the hood that looks like the one in Figure 6 and place it in either the front right (passenger) or rear left (driver) corner. With the hood in place swing the latch plate down so the lip catches under the lip on the extension and thread the plastic knob to secure to combine. It is easier to attach the latch on the front (for the passenger side) or rear (for the driver side) factory extension panels and then the two side latches on the side extension panels. On the two front and the left rear hoods, the latches secure to the combine like Figure 10 while the right rear hood the latches secures



Figure 10




Figure 11



Figure 12

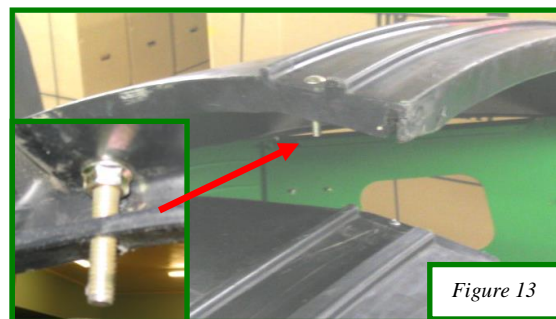


Figure 13

to the combine like Figure 11. Next bring up one of the hoods with a decal/writing on it. **On 2014 and older combines the hood with green latch goes in the right rear corner of the combine.** Place the hood so it locks into the water trough of the first hood you brought up. Secure the hood to the combine with the latches.

**NOTE:** If the lip of the second hood doesn't want to go into the trough of the first hood lift both hoods up in the middle until the lip goes into the trough and then lower them down. The end latches may have to be unhooked to do this.

Line the two hoods up so that the top is flush and the ribs are lined up. Find the pre drilled hole in the top hood with the decal/writing on it and drill through the bottom hood. Make sure the drill is straight up and down. (See Figure 12)

Pull the hoods apart. On the top hood with the decal/writing install a 3/8" x 2-1/4" carriage head bolt through the pre drilled hole that was just used as a guide to drill the bottom hood. Slide the bolt through the top and thread a 3/8" serrated flange nut on. (See Figure 13) Hammer the head of the carriage bolt into the hood so it pulls into the plastic easier.

Put the hoods back together so the bolt goes through the bottom hood and screw the plastic knob on to clamp the hoods together. (See Figure 14)

Repeat for other side of the combine.

With all hoods on the combine place the middle support bracket between the hoods. You have to push the hoods apart to get the bracket between the hoods. The hoods sit between the plates the middle support bracket. This will keep your hoods at the correct spacing.

Position the middle support bracket so the pipe is at the splice of 2 hoods. Makes sure the bracket is below the top of the hood and drill 1/4" holes through the hood and the back tab of the bracket using the holes in the bracket as a template. Insert the 1/4"x1-3/8" quick lock pins to secure the bracket in place. (See Figure 15)

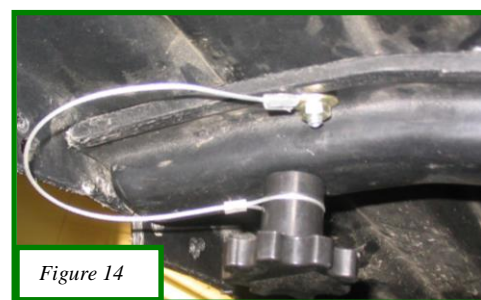


Figure 14



Figure 15

### Step 5: Hood Support Installation (Refer to Figure 16-18)

Measure 2" up from the hinge on the extension panel brace that is under the "Trough Hood" at the bottom edge to the Bottom Hood Support Bracket. (See Figure 16) Lag the bracket to the extension support with the self-drilling lag screws. Hold the Top Hood Support Bracket into the upper corner of the "Trough Hood" so that it is lined up with the brace on the extension. Drill ¼" holes through the hood and bolt together with ¼" x ¾" truss head bolts and lock nuts. (See Figure 17) Attach the Hood Support Tubing to the bracket using ¼" x 2 ½" quick pins.

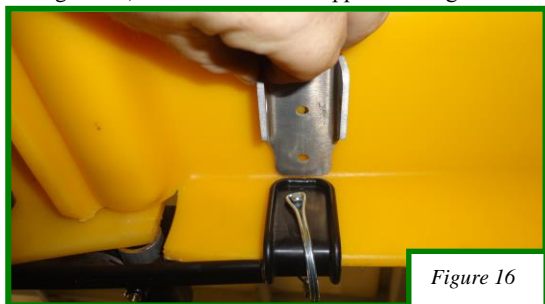


Figure 16



Figure 17



Figure 18

### Hood Support Installation 2020 Update (Refer to Figure 19-20)

On 2020 and newer model combines, there was an update to the right-hand side extension support brace. The brace does not go to the bottom of the extension like the other side, see Figures 17 & 18. The Bottom Support Brace now needs to be mounted at the bottom of the short extension support as shown in Figures 19 & 20. It is then required, to use the longer Hood Support Brace on the right side of the combine. Note: there are 2 short braces and 1 long brace in the supplied kit.

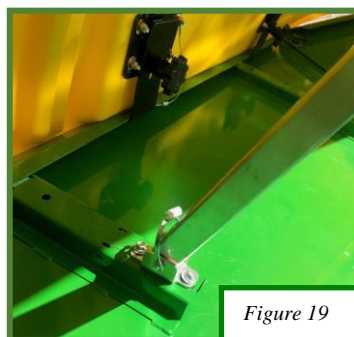


Figure 19



Figure 20

### Step 6: Electrical Installation (See Figure 19 - 20)

Mount the switch bracket to the inside of the sample door. (Figure 21) The solenoid block connects to the battery, switch and motor so place it in an area where all 3 wires will meet. The motor will be located at the rear right of the combine hopper. Secure the solenoid block to combine with ¼"x1" hex bolts and nylon lock nuts.




Figure 21

#### Electrical Wire

**Wire from Switch to Solenoid Block (14-3 Wire)** - Run the 14-3 wire from the solenoid block to the rocker switch located in the sample door. Run the wire along the existing wiring and hydraulic hoses and secure with plastic tie straps. Secure the wire by the switch with a wire clip and bolt it to the hopper with bolt holding on the switch bracket.

The three wires at the switch all get 14ga female spade ends crimped on. The black wire is attached to the center post. The GREEN wire goes on the post that is on the same side of the switch marked CLOSE. The WHITE wire goes on the post that is on the same side of the switch marked OPEN. At the solenoid the WHITE and GREEN wires both get 14ga female spade connectors crimped on and the BLACK wire gets a 14ga - ¼" ring terminal crimped on. Bolt the BLACK wire onto the positive post (+) of the solenoid. The GREEN wire connects to the left post on the solenoid block and the WHITE wire connects to the right post. NOTE: If the motor runs the wrong way reverse the WHITE and GREEN wires at the solenoid.

**Wire from Battery to Solenoid Block (#6 Double Strand)** - Run the #6 double strand wire from the battery to the solenoid block. Secure along the way with plastic ties and wire clips. Cut the wire leaving a little slack in the wire so you are able to crimp the wire ends on at each end.

Mount the 50 amp auto reset circuit breaker with in 6" of the battery so it can be spliced into the positive #6 wire running to the solenoid block. Slide a red rubber boot onto the positive wire and a black rubber boot onto the negative wire. Crimp two #6-1/4" ring terminals to the ends. The wire with the red stripe will be the positive wire and will get bolted on the positive post marked (+) along with the black 14Ga wire running from the switch. The black wire or negative wire will be bolted onto the bottom negative post (-). Cut the positive wire by the circuit breaker and crimp two #6-#10 studs on and bolt circuit breaker. Wrap the circuit breaker with electrical tape to help prevent shorts. Connect the wire ends to battery later.

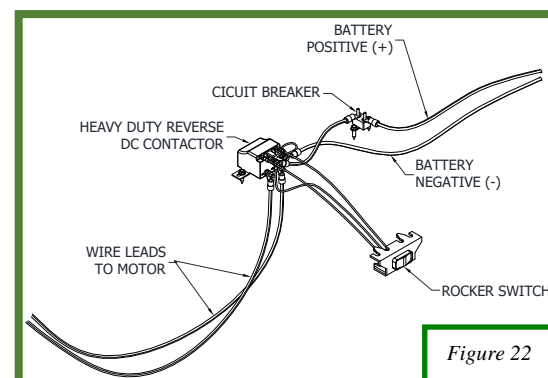


Figure 22

#### Wire from Solenoid Block to Motor (#6 Double Strand)

Run the remaining #6 double strand wire to the rear right side of the combine hopper and up to the motor. Secure the wire with the supplied wire clips and plastic ties to the combine. The ends at the solenoid both get a black rubber boot and a #6-1/4" stud crimped on. Connect the wires to the bottom posts on the solenoid. It does not matter which wire goes on which post. The wire ends at the motor each get #6-1/4" studs crimped on. Connect the wire ends to the battery with the red wire going to the positive terminal.

## Step 7: Tarp Installation

(See Figure 23-25)

At to the front rolltube assembly wrap the tarp around the front rolltube (clockwise when looking from the left driver side) once or twice until there is a little bit of tension on the tarp. Slide the pipe into the pocket and put one of the straps on the pipe in the cut out in the tarp. Repeat for the other side. Center the pipe in the pocket and run the straps to the back.

Remove the quick pins from the plastic strap pulleys and secure the strap to the pulley by sliding the quick pin back through the pulley and through the pocket in the strap.

Adjust the position of the strap pulley on the rear rolltube by loosening the set screws in the pulley. Once close, tighten the **4 set screws** and repeat for other side. The strap runs in-between the ribs on the hood.

Once both straps are connected, close the tarp by pressing the **CLOSE** direction on the switch. When the tarp is closed check alignment of the strap pulleys to see if one side is tighter than the other. If one side is tighter than the other, loosen the sets screws of the tight pulley and turn the pulley back so it has the same tension as the other strap. There are 4 set screws on each pulley. The set screws are 90 degrees from each other. Note: Once the straps are tensioned and the tarp roles open and closed properly, drill 3/16" holes at each set screw location. This will prevent the pullies from slipping on the roll tube.

The tarp **MUST** be open to adjust the position of the pulleys because there is extreme pressure on the straps.

Double check to make sure the straps are wrapping up on the pulleys correctly (See Figure 25). If the straps are wrapping up wrong, the outside wires on the switch need to be switched around to change the direction of the motor. When the straps wrap up wrong the tarp might not be able to close fully.

With the tarp open, center the pull pipe in the pocket of the tarp. Secure the straps to the pipe with plastic clips and the #10x3/4" wafer tek screws by placing the clip over the strap on the rear pipe and drilling through the strap and pipe. When done this will not allow the straps not to slide off the rear pipe. (See Figure 34)

## Step 8: Dismantling of Hopper Top for Transportation

(See Figure 28-28)

Open the tarp fully and then remove the quick pins from the strap pulleys on the rear rolltube assembly so the straps are free. Once the straps are removed, place the quick pins back in the strap pulleys so they don't get missed placed. Throw the straps to the front of the combine. Remove the middle support pipe by taking out the 1/4"x1-3/8" quick pins and pushing the hoods out. Remove the quick pins from the upright support braces and remove the braces. Next loosen the latches on the front left (driver) corner hood. Remove hood and place it in hopper of the combine. Then loosen the latches off the rear left (driver) corner hood and place on top of the other hood as shown in Figure 26. Repeat for the other side. Take the bubble up down and set on top of the hoods to keep them secure. The corner extension plates get removed and set in the hopper. Then fold in the front and rear extensions and tuck the straps into the tarp and rolltube assembly so they don't blow around. Finally fold the side extensions in and then all the tarp components are in the hopper.

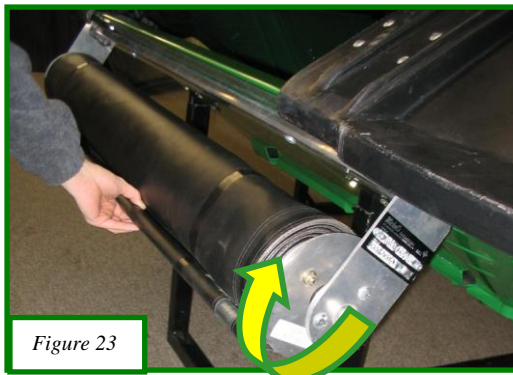


Figure 23

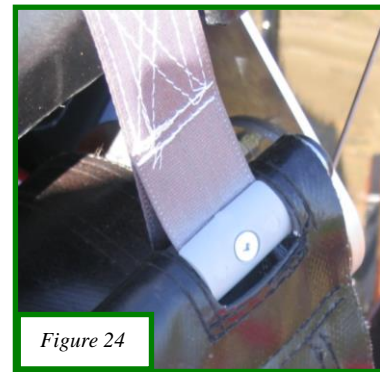


Figure 24

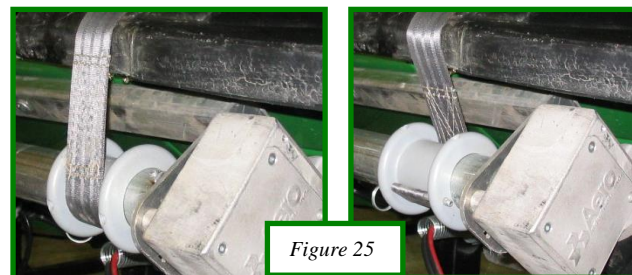


Figure 25

**RIGHT**

**WRONG**



Figure 26



Figure 27



Figure 28

## Transporting with a Combine Cover

For transporting any combine with a Michel's Harvest Protect System on a trailer, it is recommended that the system be disassembled and the hopper extensions be folded in. Otherwise, the load may be over height. If it is decided to leave the system assembled, it is done **at your OWN risk**. Michel's recommends double-checking to make sure all the latches are tight, securing the hoods properly to the combine and to have the tarp all the way in the **OPEN position**. Reduced speeds are recommended. Michel's Industries assumes **NO** responsibility or liability for any damage or injuries that may occur should the hoods blow off during transport.



## Operating Instructions

To open and close the tarp system, simply hold the rocker switch mounted just outside of the cab. PLEASE NOTE: ensure you are hitting "open" on the switch to open the tarp and "close" on the switch to close the tarp. When opening the tarp, you must let go of the switch when the tarp is all the way open. If you continue to hold the switch in the open position the tension of the tarp will unwrap all of the strap on the rear strap pulleys and begin to close up again. When closing the tarp simply hold "close" on the switch until the circuit breaker cuts the motor out.

## Warranty

Michel's Industries warrants their products for a period of one year from date of purchase. **ONLY** the Super Tork electrical motor has 18-month warranty from date of purchase and is **VOID** if opened or tampered with. Any parts returned to Michel's Industries LTD. will be shipped prepaid by the customer and will be returned F.O.B. St.Gregor, Sk. Canada. We will not assume responsibility for shipping, labor or travel expenses. Please Note: We reserve the right to make improvements; therefore, specifications are subject to change without notice.



## Trouble Shooting / Maintenance

Problem	Solution
1. There is no tension of the front Roll Tube and the tarp is loose when all the way open	1. Open the tarp all the way open. Remove the straps from the strap pulleys by pulling the quick pins out and wrap the tarp on the front Roll Tube one turn Clockwise, when looking from the left. (driver side) This will add tension to the spring in the Front Roll Tube. Hook the straps back up th the strap pulleys. <b>Refer to "Tarp Installation" in your installation manual.</b>
2. The Tarp Material is not closing all the way covering the hopper completely.	2. First check to make sure your switch is set up so "close" closes the tarp and "open" is opening your tarp with the straps winding on the rear pulleys the correct way. <b>Refer to "Tarp installation" in your Installation Manual. See pictures of the wrong and right way for the pulleys to wind the straps.</b>
3. Motor, switch, and Solenoid (reverse DC contactor) Troubleshooting	3. If the straps are winding correctly you may have a faulty circuit breaker. Contact Michel's Industries or your local dealer for further instructions.
4. All Electrical	4. Refer to the following Electrical Troubleshooting sheet.

**Michel's** Industries, Ltd.

P.O. Box 119

St. Gregor, Saskatchewan

S0K 3X0 Canada

Ph#(306)366-2184 or Fax#(306)366-2145


## Trouble Shooting Electric System

- 1) The motor does not work. How to check and see if the problem is the motor?  
 Unhook the wires at the motor. Use a set of jumper (booster) cables and hook up one end directly to a 12v battery using red for positive and black for negative. On the other end, hook one clamp on to one of the motor posts and the other on the remaining motor post. The motor should start turning. Then witch the clamps on the motor and the motor should turn the opposite direction. If motor does not run both directions, it will need to be replaced. **\*\*DO NOT TAMPER WITH MOTOR OR GEAR BOX AS THIS WILL VOID THE WARRANTY. \*\***  
 For a replacement motor or warranty, call 1-306-366-2184.

- 2) If the motor tests ok, but when the switch is used it still does not work. Check the following.

- Trace the wire from the motor to the solenoid block and check for damage and cuts.
- At the solenoid block double-check all connections to make sure they are all tight and clean.
- If the connections are all tight press the switch open and close and have somebody listen if the solenoid clicks in both directions.
- If the solenoid clicks when the switch is pressed both ways then there is a problem with the wire running from the solenoid to the motor.
- If the solenoid only clicks one way then there is a problem with either the switch or the solenoid or there could be a loose connection.
- If the solenoid does not click, then there are 4 things that may be causing the problem.
  1. Switch
  2. Solenoid
  3. No power at the solenoids
  4. Loose connections on the switch or solenoid
- **Test Switch** – First see if there is power coming to the switch by using a 12v tester with the ground attached to the combine frame and the positive to the positive (+) post of the switch.
  - i. If there is no power at the switch then there will be no power at the solenoid, or the wire has a loose connection, or the wire has been damaged between the switch and the solenoid.
  - ii. If there is power then see if there is power leaving the switch. Press the switch to one side and check for power on the opposite side of the switch. Check both directions.
    - a. If there is no power at one or both sides then the switch needs to be replaced.
    - b. If there is power on the switch on both sides then check the solenoid to see if there is power coming from the switch.
- **Test for power at the Solenoid** - Use a 12v tester and connect the ground/negative to the negative post of the solenoid and the positive to the positive (+) post to see if there is power. If there is no power at the solenoids, then there are 3 things that could be wrong.
  - i. Loose connection on your battery
  - ii. Wire is damaged
  - iii. Circuit breaker

Trace the wire back to the battery checking for damage and loose connections. If there is no damage or loose connections test for power on both sides of the circuit breaker. If there is no power, bypass the inline circuit breaker and test to see if there is power at the solenoid. If there is power then the circuit breaker needs to be replaced.
- **Test for power at the Solenoids coming from the Switch.** Connect the ground to the negative post of the solenoid and the positive to one of the small posts that a 14G wire is connected to. Press the switch either way to see if there is power coming to the post. Check both posts.
  - i. If there is no power coming to one or both of the posts then check the wire for damage or loose connections.
  - ii. If there is power at both posts then test to see if there is power leaving the solenoid.
- **Test for power leaving the Solenoids.** With the ground attached to the negative post, connect the positive to the one of the outside posts. Press the switch either way to see if there is power there. Check both posts.
  - i. If there is power at both posts then check the wire running to the motor for damage and loose connections.
  - ii. If there is no power at one or both posts then the solenoid needs to be replaced.

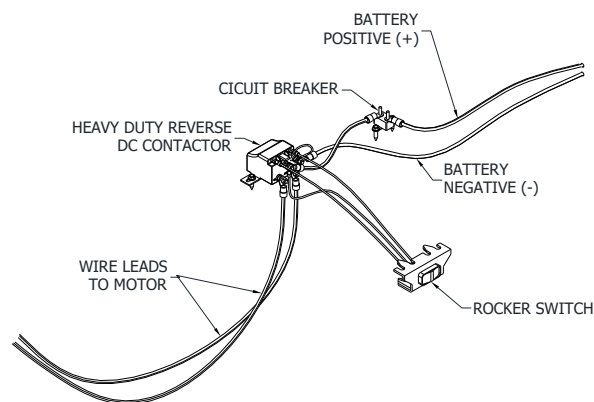

**Michels** Industries, Ltd.

P.O. Box 119

St. Gregor, Saskatchewan

S0K 3X0 Canada

Ph#(306)366-2184 or Fax#(306)366-2145