


Michel's Load-Loc


INSTALLATION INSTRUCTIONS

**PLEASE READ ENTIRE INSTRUCTIONS BEFORE BEGINNING
THESE INSTRUCTIONS ARE FOR A STANDARD ROLLING TARP
THAT LOCKS CLOSED ON THE DRIVER'S SIDE**


Step 1: Remove and replace all U-Clamps within the front 11' of the tarp. Fasten back together with the self tapping screws provided once return is in tube.

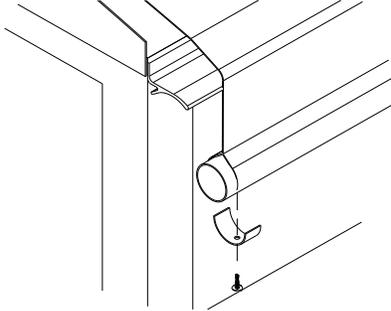


Step 2: Insert the Load-Loc Return assembly into the main roll tube.

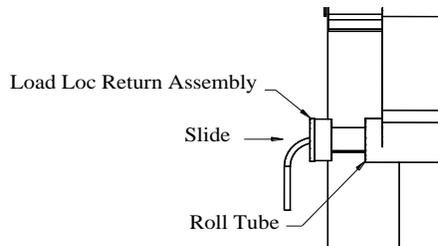


Step 3: Gently tap the Load-Loc Return into the roll tube if necessary. Drill a 9/64" hole through the roll tube 7/16" from the edge of the rope guide. Fasten together with a #8 self-tapping screw.



Step 4: Drill a 11/32" hole through the latch plate a 1 1/2" past the end of tarp. Fasten the eyebolt in the hole with the 5/16" nuts.

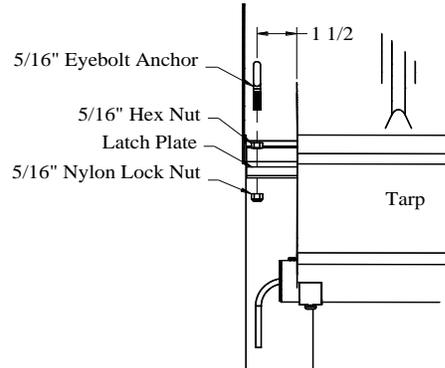

Step 5: Insert the Load-Loc Return Rope into the eyebolt, make sure to remove all the slack from rope and knot the rope to prevent it from coming out. Cut off any extra rope and melt the frayed end.

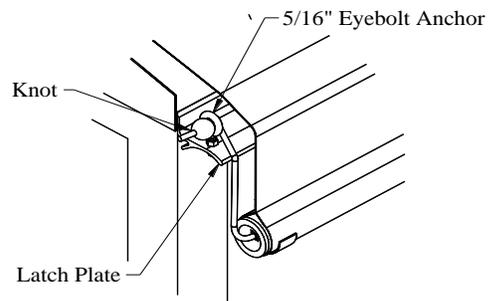

Warranty Michel's Industries warrants their product for a period of one year from date of purchase. Any parts returned to Michel's Industries LTD. Will be shipped prepaid and will be returned F.O.B. St. Gregor, Sk. Canada. We will not be responsible for shipping, labor or travel expenses. Please Note: We reserve the right to make improvements, therefore specifications are subject to change without notice.

Michel's Industries LTD.

P.O. Box 119

St. Gregor, Sk. Canada S0K 3X0

TEL. (306) 366-2184 FAX (306) 366-2145